


PN	AD0105B
RF freq [MHz]	100
RF Pwr [dBm]	0
LO Pwr [dBm]	5
Freq Step Size [MHz]	1.9500

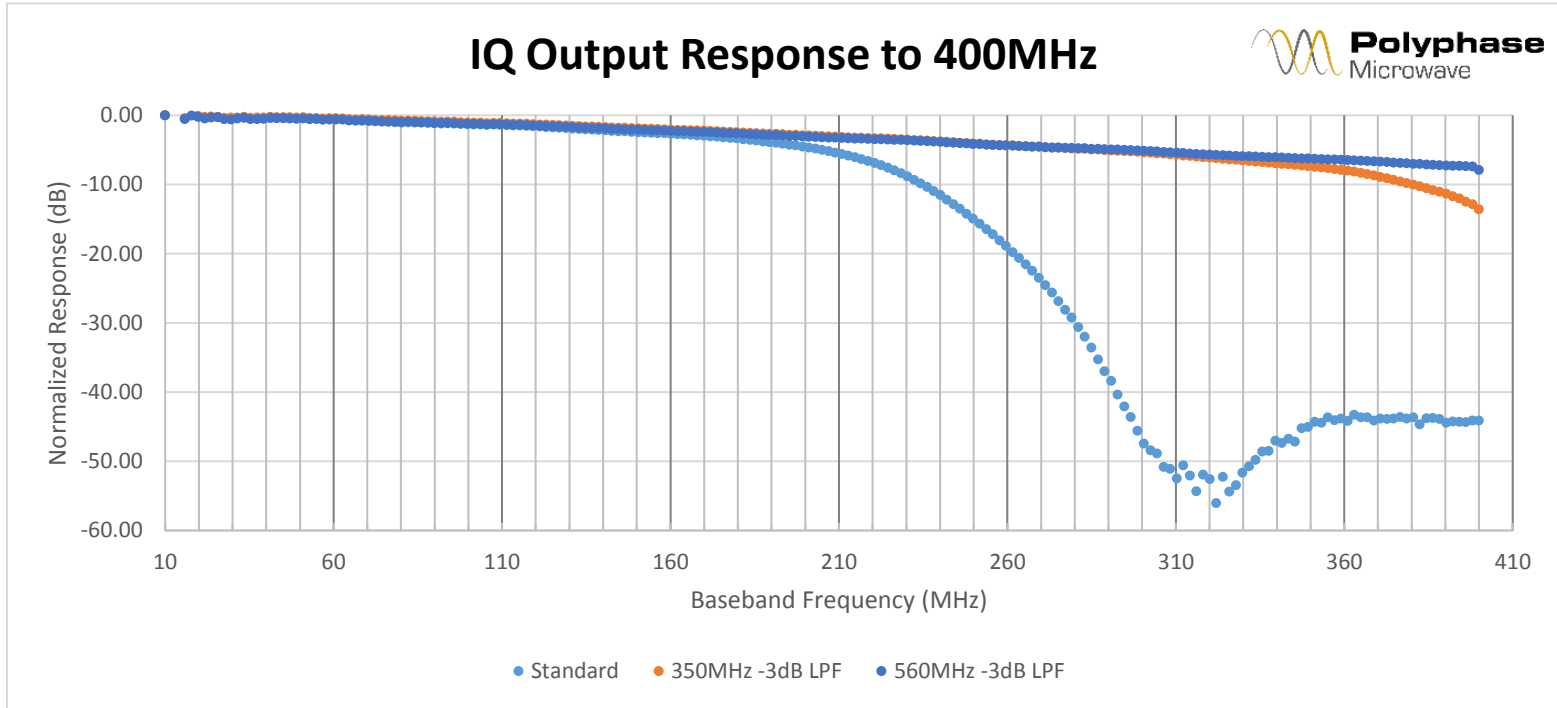

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
10.00	0.00	0.00	0.00
11.95	0.14	0.30	0.02
13.90	0.14	0.19	0.04
15.85	-0.46	-0.43	-0.56

Data Set: 350MHz -3dB LPF				
Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
17.80	0.00	0.05	-0.06
19.75	-0.13	-0.11	-0.23
21.70	-0.35	-0.23	-0.46
23.65	-0.29	-0.20	-0.31
25.60	-0.30	-0.23	-0.31
27.55	-0.54	-0.40	-0.58
29.50	-0.54	-0.34	-0.59
31.45	-0.44	-0.32	-0.49
33.40	-0.35	-0.22	-0.39
35.35	-0.50	-0.39	-0.55
37.30	-0.49	-0.33	-0.55
39.25	-0.46	-0.35	-0.51
41.20	-0.40	-0.25	-0.40
43.15	-0.40	-0.29	-0.42
45.10	-0.42	-0.28	-0.45
47.05	-0.42	-0.29	-0.48
49.00	-0.49	-0.35	-0.51
50.95	-0.40	-0.28	-0.48
52.90	-0.51	-0.39	-0.56
54.85	-0.55	-0.41	-0.52
56.80	-0.59	-0.48	-0.65
58.75	-0.60	-0.42	-0.60
60.70	-0.62	-0.42	-0.60
62.65	-0.61	-0.46	-0.62
64.60	-0.74	-0.55	-0.76
66.55	-0.80	-0.60	-0.77
68.50	-0.80	-0.56	-0.77
70.45	-0.84	-0.61	-0.81

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
72.40	-0.88	-0.69	-0.86
74.35	-0.95	-0.72	-0.88
76.30	-0.95	-0.71	-0.93
78.25	-1.01	-0.77	-0.95
80.20	-1.05	-0.80	-0.99
82.15	-1.04	-0.78	-0.94
84.10	-1.07	-0.81	-0.97
86.05	-1.07	-0.82	-1.00
88.00	-1.14	-0.87	-1.04
89.95	-1.16	-0.90	-1.10
91.90	-1.20	-0.95	-1.12
93.85	-1.18	-0.93	-1.13
95.80	-1.23	-0.96	-1.16
97.75	-1.28	-1.02	-1.22
99.70	-1.30	-1.05	-1.23
101.65	-1.33	-1.06	-1.25
103.60	-1.34	-1.08	-1.27
105.55	-1.42	-1.16	-1.33
107.50	-1.37	-1.12	-1.31
109.45	-1.40	-1.13	-1.32
111.40	-1.44	-1.15	-1.37
113.35	-1.50	-1.21	-1.40
115.30	-1.51	-1.21	-1.41
117.25	-1.55	-1.22	-1.44
119.20	-1.60	-1.30	-1.50
121.15	-1.65	-1.33	-1.53
123.10	-1.72	-1.36	-1.58
125.05	-1.76	-1.42	-1.62

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
127.00	-1.80	-1.45	-1.65
128.95	-1.87	-1.49	-1.69
130.90	-1.93	-1.54	-1.73
132.85	-2.00	-1.59	-1.79
134.80	-2.04	-1.61	-1.82
136.75	-2.10	-1.64	-1.86
138.70	-2.15	-1.69	-1.87
140.65	-2.19	-1.72	-1.92
142.60	-2.27	-1.79	-1.98
144.55	-2.30	-1.82	-2.01
146.50	-2.34	-1.83	-2.02
148.45	-2.39	-1.88	-2.08
150.40	-2.44	-1.91	-2.11
152.35	-2.50	-1.96	-2.14
154.30	-2.53	-1.96	-2.16
156.25	-2.58	-2.00	-2.19
158.20	-2.61	-2.04	-2.22
160.15	-2.70	-2.09	-2.26
162.10	-2.75	-2.12	-2.31
164.05	-2.80	-2.14	-2.33
166.00	-2.85	-2.19	-2.38
167.95	-2.91	-2.20	-2.40
169.90	-2.96	-2.23	-2.41
171.85	-3.07	-2.29	-2.48
173.80	-3.12	-2.34	-2.50
175.75	-3.19	-2.37	-2.56
177.70	-3.30	-2.42	-2.60
179.65	-3.35	-2.44	-2.62

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
181.60	-3.46	-2.49	-2.69
183.55	-3.56	-2.54	-2.73
185.50	-3.66	-2.58	-2.77
187.45	-3.78	-2.63	-2.81
189.40	-3.89	-2.68	-2.86
191.35	-3.97	-2.68	-2.88
193.30	-4.13	-2.76	-2.94
195.25	-4.26	-2.83	-3.00
197.20	-4.38	-2.84	-3.02
199.15	-4.54	-2.91	-3.08
201.10	-4.68	-2.93	-3.11
203.05	-4.84	-2.96	-3.14
205.00	-5.03	-3.03	-3.19
206.95	-5.21	-3.07	-3.24
208.90	-5.41	-3.10	-3.27
210.85	-5.61	-3.15	-3.30
212.80	-5.84	-3.19	-3.35
214.75	-6.07	-3.23	-3.37
216.70	-6.33	-3.25	-3.39
218.65	-6.60	-3.28	-3.42
220.60	-6.90	-3.33	-3.46
222.55	-7.22	-3.35	-3.49
224.50	-7.59	-3.41	-3.53
226.45	-7.96	-3.43	-3.55
228.40	-8.40	-3.48	-3.59
230.35	-8.83	-3.51	-3.61
232.30	-9.34	-3.59	-3.68
234.25	-9.85	-3.62	-3.72

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
236.20	-10.38	-3.66	-3.75
238.15	-10.98	-3.74	-3.82
240.10	-11.55	-3.78	-3.86
242.05	-12.21	-3.84	-3.92
244.00	-12.88	-3.90	-3.97
245.95	-13.53	-3.97	-4.02
247.90	-14.26	-4.02	-4.08
249.85	-14.96	-4.09	-4.15
251.80	-15.70	-4.11	-4.18
253.75	-16.45	-4.20	-4.25
255.70	-17.22	-4.24	-4.29
257.65	-18.09	-4.29	-4.34
259.60	-18.89	-4.33	-4.37
261.55	-19.79	-4.38	-4.41
263.50	-20.62	-4.44	-4.46
265.45	-21.55	-4.49	-4.50
267.40	-22.50	-4.53	-4.54
269.35	-23.51	-4.56	-4.56
271.30	-24.57	-4.63	-4.62
273.25	-25.63	-4.67	-4.66
275.20	-26.85	-4.69	-4.67
277.15	-28.12	-4.75	-4.70
279.10	-29.24	-4.80	-4.75
281.05	-30.63	-4.86	-4.78
283.00	-32.02	-4.88	-4.79
284.95	-33.58	-4.94	-4.86
286.90	-35.28	-4.98	-4.86
288.85	-36.99	-5.04	-4.90

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
290.80	-38.37	-5.08	-4.94
292.75	-40.36	-5.13	-4.97
294.70	-42.08	-5.19	-5.03
296.65	-43.59	-5.24	-5.07
298.60	-45.62	-5.30	-5.11
300.55	-47.44	-5.36	-5.14
302.50	-48.43	-5.44	-5.20
304.45	-48.89	-5.51	-5.26
306.40	-50.83	-5.57	-5.31
308.35	-51.10	-5.65	-5.38
310.30	-52.52	-5.72	-5.42
312.25	-50.61	-5.81	-5.49
314.20	-52.06	-5.89	-5.54
316.15	-54.34	-5.98	-5.60
318.10	-51.95	-6.07	-5.66
320.05	-52.58	-6.13	-5.70
322.00	-56.05	-6.21	-5.75
323.95	-52.28	-6.30	-5.80
325.90	-54.37	-6.37	-5.84
327.85	-53.48	-6.45	-5.89
329.80	-51.67	-6.54	-5.93
331.75	-50.73	-6.60	-5.94
333.70	-49.83	-6.70	-5.99
335.65	-48.61	-6.76	-6.03
337.60	-48.51	-6.85	-6.06
339.55	-47.03	-6.93	-6.09
341.50	-47.36	-7.02	-6.13
343.45	-46.75	-7.08	-6.16

Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
345.40	-47.16	-7.19	-6.22
347.35	-45.21	-7.28	-6.23
349.30	-45.06	-7.37	-6.26
351.25	-44.33	-7.47	-6.31
353.20	-44.46	-7.55	-6.33
355.15	-43.67	-7.66	-6.37
357.10	-44.06	-7.78	-6.40
359.05	-43.84	-7.90	-6.45
361.00	-44.19	-8.01	-6.48
362.95	-43.27	-8.16	-6.53
364.90	-43.67	-8.32	-6.57
366.85	-43.66	-8.50	-6.61
368.80	-44.13	-8.70	-6.67
370.75	-43.85	-8.91	-6.71
372.70	-43.89	-9.11	-6.76
374.65	-43.86	-9.36	-6.83
376.60	-43.63	-9.59	-6.89
378.55	-43.85	-9.82	-6.95
380.50	-43.68	-10.06	-7.02
382.45	-44.68	-10.29	-7.06
384.40	-43.79	-10.55	-7.13
386.35	-43.76	-10.81	-7.16
388.30	-43.90	-11.08	-7.21
390.25	-44.47	-11.35	-7.25
392.20	-44.24	-11.69	-7.30
394.15	-44.33	-12.05	-7.32
396.10	-44.37	-12.48	-7.37
398.05	-44.11	-12.88	-7.41



Data Set: 350MHz -3dB LPF

Attenuation Point [dB]	-1	-2	-3	-20
Frequency [MHz]	98	156	205	-

Baseband Freq (MHz)	Normalized Response[dB] For Configuration:		
	Standard	350MHz -3dB LPF	560MHz -3dB LPF
400.00	-44.11	-13.58	-7.90