



TYPICAL PERFORMANCE CHARACTERISTICS

Standard Test Conditions: +25°C, LO = +14 dBm, RF input = 0 dBm @ LO+100 kHz.


Conversion Loss

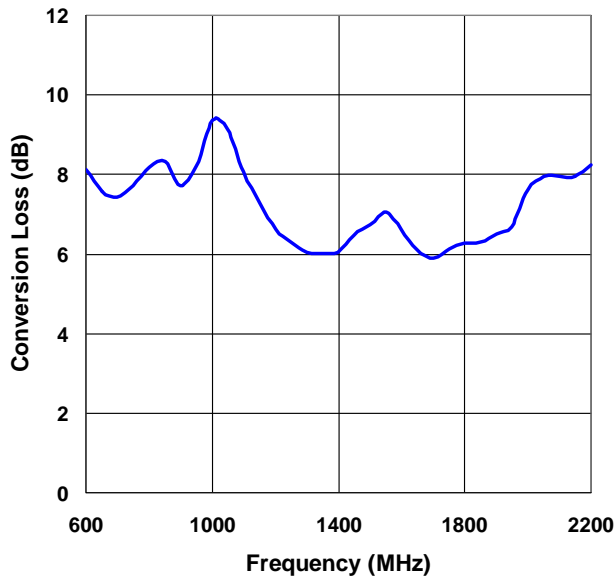


LO-RF Isolation

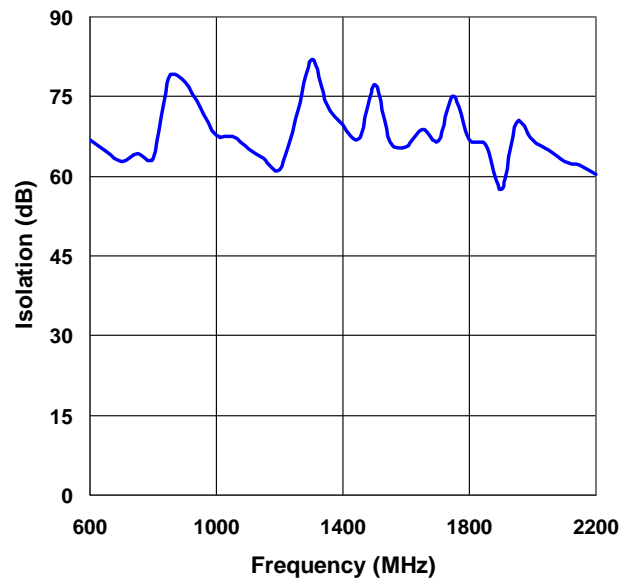

Amplitude Imbalance

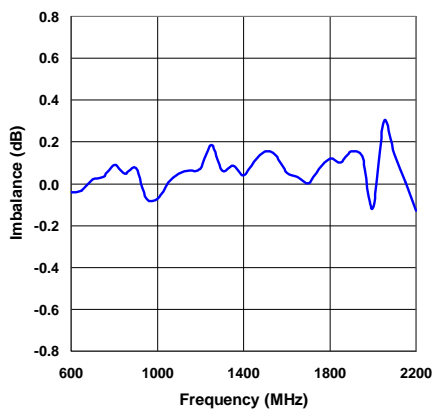

Quadrature Phase Error

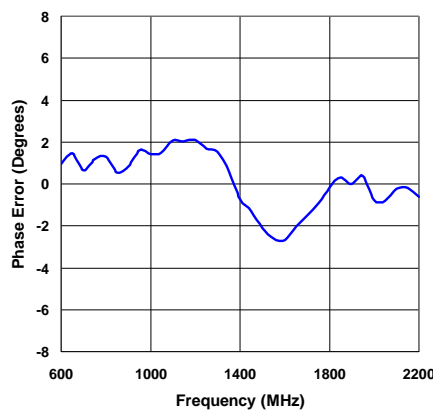

DC Offsets

