



TYPICAL PERFORMANCE CHARACTERISTICS

Standard Test Conditions: +25°C, RF Input = +14 dBm, IF input = 0 dBm @ 30 MHz

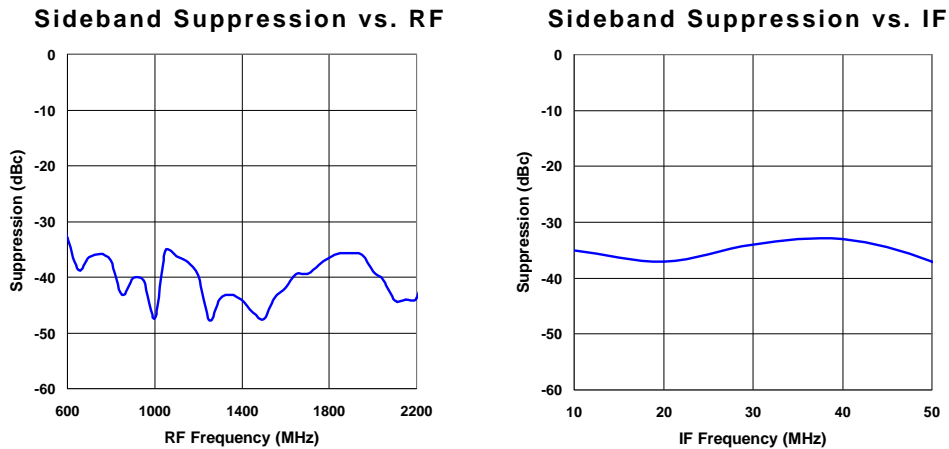

CASE DRAWING

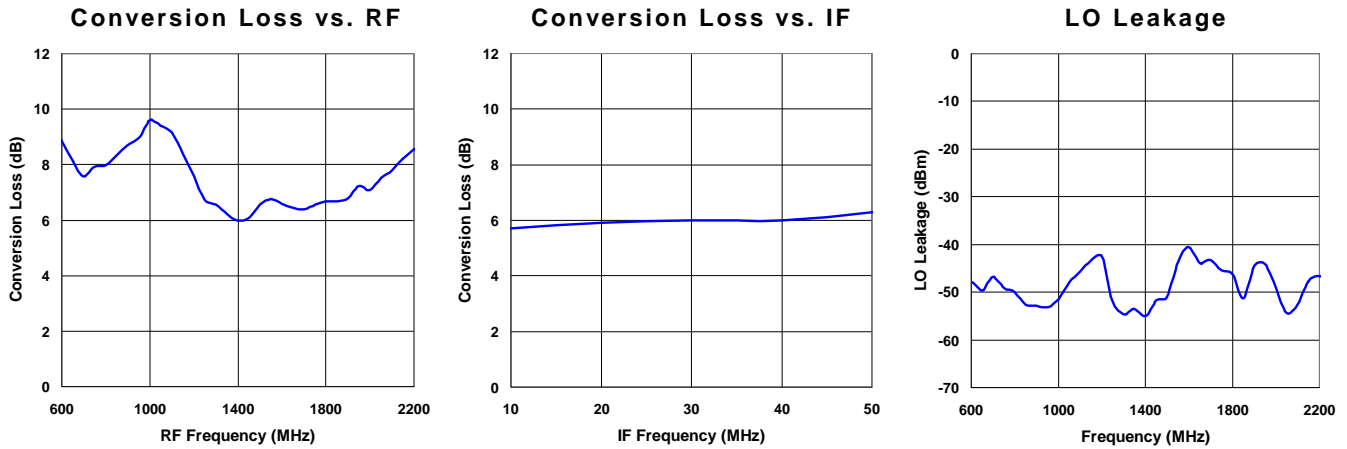