TYPICAL PERFORMANCE CHARACTERISTICS

Standard Test Conditions: +25°C, RF (LO) Input = +15 dBm, RF Input = 0 dBm @ LO+30 MHz.

Conversion Loss

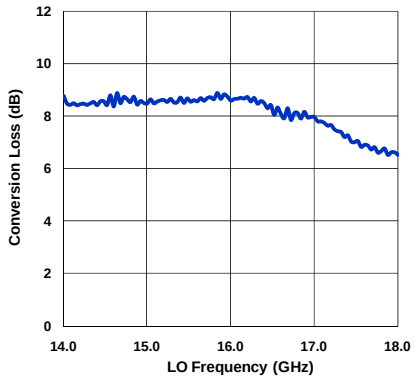

LO Leakage

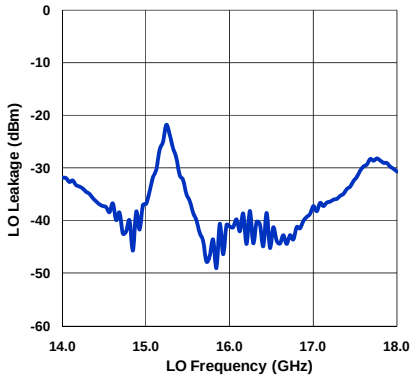

Sideband Suppression

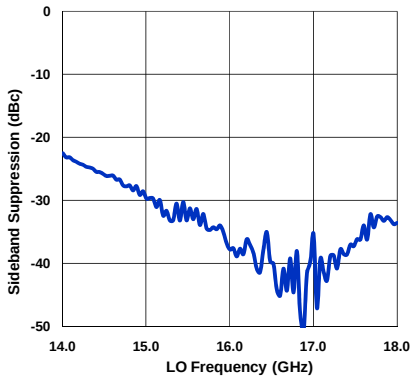

DIMENSION DRAWING

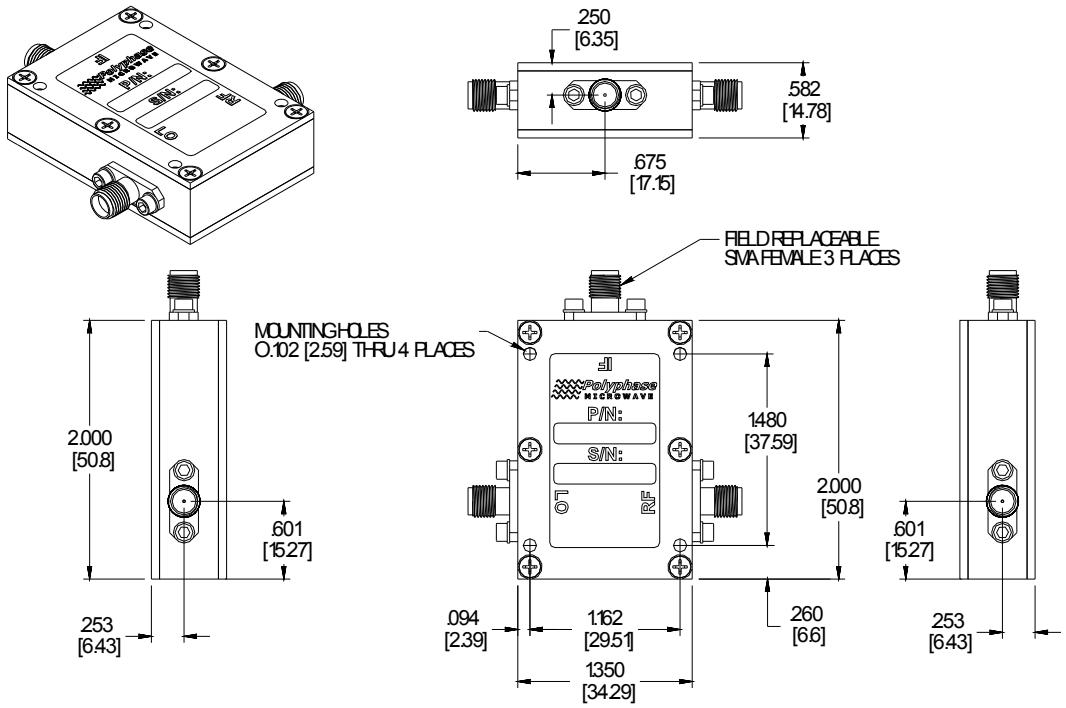

Polyphase Microwave Inc.
1983 S Liberty Drive
Bloomington, IN 47403

Polyphase MICROWAVE
A Technology Service Corporation Company

www.polyphasemicrowave.com

Phone: + 1 (812) 323 - 8708
Fax: + 1 (812) 323 - 8709

© 2014 Polyphase Microwave Inc.