



TYPICAL PERFORMANCE CHARACTERISTICS

Standard Test Conditions: +25°C, RF (LO) Input = +15 dBm, RF Input = 0 dBm @ LO+30 MHz.


Conversion Loss

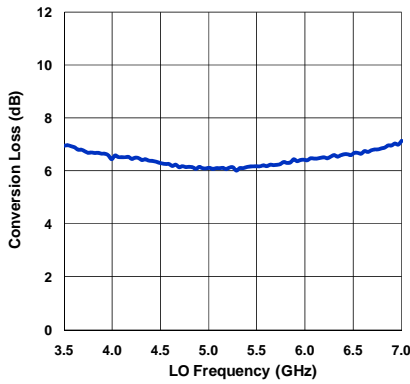

LO Leakage

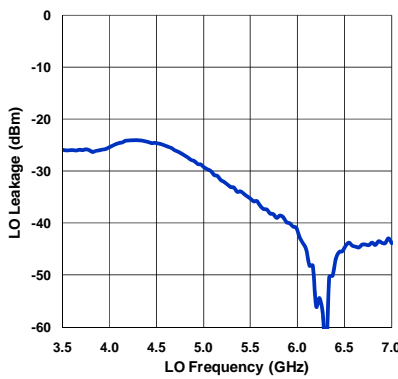

Sideband Suppression

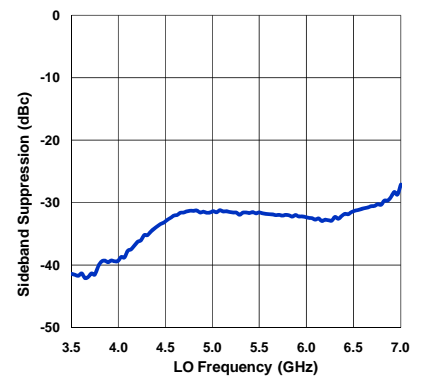

DIMENSION DRAWING

