





**TYPICAL PERFORMANCE CHARACTERISTICS**

Standard Test Conditions: +25°C, RF (LO) Input = +15 dBm, RF Input = 0 dBm @ LO+30 MHz.


**Conversion Loss**

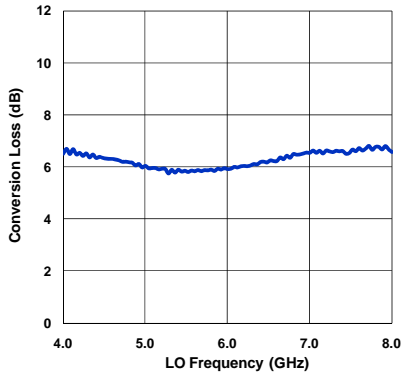

**LO Leakage**

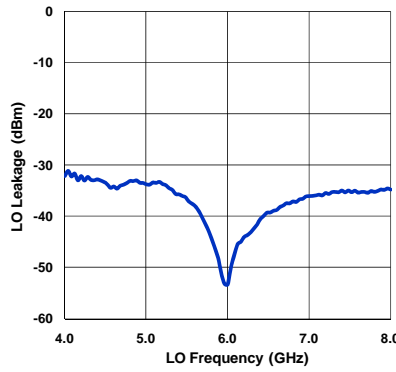

**Sideband Suppression**

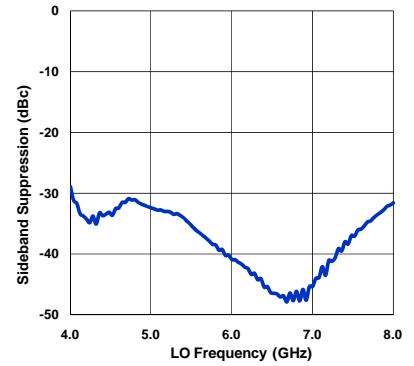

**DIMENSION DRAWING**

