

LONGEST ENDURANCE UAS IN ITS CLASS WITH LOW-COST ADVANTAGES

Derived from years of collective operational expertise, including cost reduction manufacturing and modular functionality to optimize ISR mission performance.

TSC teamed with Pipistrel's innovative aerospace design and manufacturing capabilities and AEVEX's ISR engineering and integration expertise to deliver our next-generation, commercially available, long-endurance, semi-autonomous, Group 5 multi-INT platform, NATHUSIUS.

MAXIMUM LIFE-CYCLE PERFORMANCE AND EFFICIENCY

- Autonomous take-off and landing
- Semi-autonomous "point-click" operation
- Innovative design for O&M sustainment
- Large internal stores for discreet mission payloads

BEST VALUE MULTI-INT PLATFORM IN ITS CLASS

 When comparing overall system capability vs cost, NATHUSIUS exceeds all others



PIPISTRELY


BY TEXTRON ORVINTION

tsc.com



NATHUSIUS SPECIFICATIONS

MAXIMUM ENDURANCE PROFILE FOR SINGLE SITE TAKEOFF & LANDING

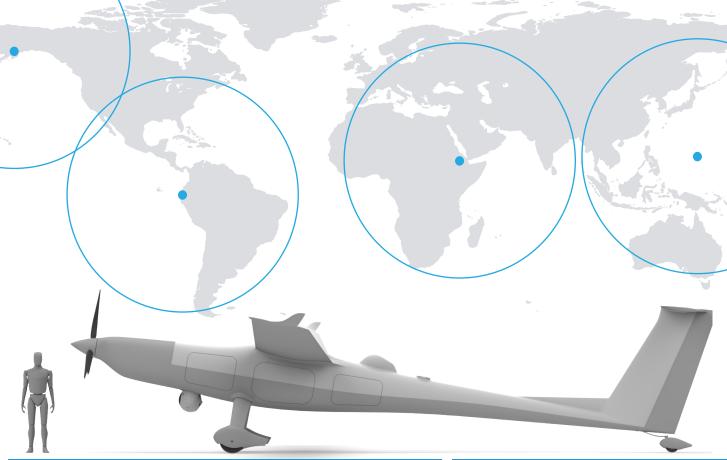

CHARACTERISTICS			
Length	35 ft	10.7 m	
Wingspan	95.5 ft	29.1 m	
External Payload Stores	440 lbs	200 kg	
Internal Payload Stores	350 lbs	158.7 kg	
Engine	Rotax 916 - Turbocharged iS engine with best power-to-weight ratio		
Fuel	Auto and AVGAS flexible		
Flight Critical Actuation	Redundant		
Autopilot	Redundant		
Backup Battery System	1+ hrs		
BLOS & LOS	Redundant		
Voice Comms	Provisioned		
IFF	Customer selected		
Sense & Avoid	Provisioned		
PNT	Multimode Ridgeback or customer selected		
Onboard Networks	Redundant		

MAXIMUM PERFORMANCE			
MGTO Weight	4,001.5 lbs	1,815 kg	
Service Ceiling	30,000+ ft	9,144+ m	
Dash Speed	100+ KTAS		
Max Endurance	72+ hrs		

Maximum performance is subject to several factors inclusive to environment, concept of operations, and specific aircraft configurations.



Packs into a standard 40' Shipping Container





